

# CS-303T CHAIN SAW

# Instruction Manual

#### **WARNING**





#### **Burn Hazard**

The muffler or catalytic muffler and surrounding cover may become extremely hot. Always keep clear of exhaust and muffler area, otherwise serious personal injury may occur.

#### **WARNING**

The engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

#### **WARNING**



Users of this equipment risk injury to themselves and others if the unit is used improperly and/or safety precautions are not followed. ECHO provides an operator's manual. It must be read and understood for proper and safe operation. Failure to do so could result in serious injury.

Specifications, descriptions and illustrative material in this literature are as accurate as known at the time of publication, but are subject to change without notice. Illustrations may include optional equipment and accessories, and may not include all standard equipment.

# **TABLE OF CONTENTS**

Table of Contents	2
Packing List	
Safety	4
Rules For Safe Operation	4
Correct Use Of Chain Brake	5
Personal Condition and Safety Equipment	8
Symbols and Signs	
Manual Safety Symbols and Important Information	
Description	
Preparation For Use	
Operation	16
Fuel	
Chain Lubricant	17
Starting Cold Engine	18
Starting Hard to Start Engine	
Starting Warm Engine	
Running	
Stopping	
Checking Chain Tension	
Chain Lubrication Test	
Cutting Instructions	
Chain And Guide Bar Combination	
Guide Bar	
Saw Chain	
Maintenance	26
Skill Levels	
Maintenance Intervals	26
Air Filter	27
Spark Plug	
Check Fuel System	
Fuel Filter	
Automatic Oiler	
Oil Filter	
Guide Bar	
Sprocket	
Cooling System Cleaning	
Spark Arrestor Muffler	
Spark Arrestor Screen	
Exhaust Port Cleaning	
Carburetor Adjustment	
Setting The Saw Chain	
Troubleshooting	35
Storage	
Storage After Use	
Technical Data	
Servicing Information	
Parts/Serial Number	
Additional or Replacement Manuals	
Warranty Registration	
Service	



**CS-303T PACKING LIST** 

# **PACKING LIST**

The ECHO product you purchased has been factory pre-assembled for your convenience. Due to packaging restrictions, guide bar and saw chain installation and other assembly may be necessary.

After opening the carton, check for damage. Immediately notify your retailer or ECHO dealer of damaged or missing parts. Use the packing list to check for missing parts.

\*Some Echo units may be factory pre-assembled. Assembly tools are not supplied with these units.

	1 -	Power	Н	ead
--	-----	-------	---	-----

\_\_\_\_ - 1, Instruction manual

\_\_\_\_ - Assembly Tool(s) (If necessary)

\*\_\_\_\_ - 1, Guide bar

\*\_\_\_\_ - 1, Saw chain

\*\_\_\_\_ - 1, Tip Guard Assembly



SAFETY CS-303T

#### SAFETY

# **Rules For Safe Operation**

Kickback Safety Precautions for Chain Saw Users

#### **A WARNING**

KICKBACK may occur when the nose or tip of the guide bar touches an object, or when the wood closes in and pinches the saw chain in the cut.

Tip contact in some cases may cause a lightning fast reverse REACTION, Kicking the guide bar up and back towards the operator. Pinching the saw chain along the top of the guide bar may push the guide bar rapidly back towards the operator. Either of these reactions may cause you to lose control of the saw which could result in serious personal injury.

The tip guard device is not installed on the guide bar when you purchase your ECHO chain saw. The tip guard can be used in a majority of cutting operations, and is especially recommended for beginners, homeowners, or chain saw novices. Most cutting operations can be accomplished with the tip guard in place.


Do not rely exclusively upon the safety devices built into your saw. As a chain saw user, you should take several steps to keep your cutting jobs free from accident or injury.


- With a basic understanding of kickback, you can reduce or eliminate the element of surprise. Sudden surprise contributes to accidents.
- 2. Keep a good firm grip on the saw with both hands, the right hand on the rear handle, and the left hand on the front handle, when the engine is running. Use a firm grip with thumbs and fingers encircling the chain saw handles. A firm grip will help you reduce kickback and maintain control of the saw. Don't let go.
- Make sure that the area in which you are cutting is free from obstructions. Do not let the nose of the guide bar contact a log, branch, or any other obstruction which could be hit while you are operating the saw.
- 4. Cut at high engine speeds.
- 5. Do not overreach or cut above shoulder height.
- 6. Follow manufacturer's sharpening and maintenance instructions for the saw chain.
- 7. Only use replacement bars and chains specified by the manufacturer or the equivalent.





For more information scan this QR code.



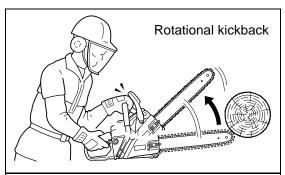

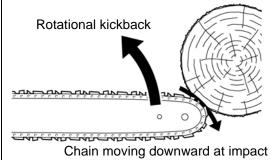

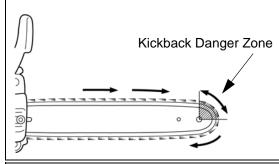

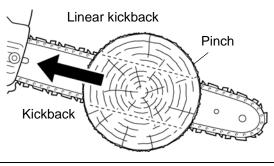

CS-303T SAFETY


#### Correct Use Of Chain Brake

#### CHAIN BRAKE OPERATION

- Set the lever in the unlocked position before starting to cut.
- If the brake is tripped by kickback reaction, the chain will stop immediately. Release the throttle to avoid possible damage to the engine or clutch.
- Do not attempt to operate the engine with the brake locked.

#### **TESTING THE BRAKE**

- Start the engine on a solid level surface and run at a fast idle until warm.
- Hold the saw firmly by the handles and accelerate the engine to a fast idle.
- Slowly operate the chain brake lever while holding the saw firmly on the ground. When the brake lever trips, the chain should stop. Immediately release the throttle trigger.

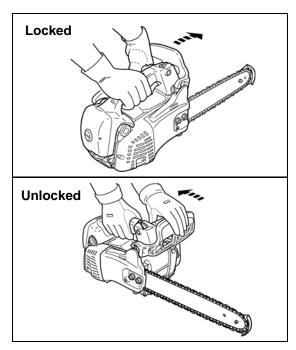

#### **NOTICE**

Do not allow the saw to tip forward in order to avoid damage to the chain.

#### **A WARNING**

If the chain does not stop immediately, return the saw to your authorized ECHO dealer for repair.

Note:

- For practice, while cutting a small tree, push the lever forward to lock the brake.
- Confirm that the brake works properly before each use.
- If the chain brake is clogged with wood chips, function of the brake may deteriorate. Always keep the device clean.
- Do not increase engine RPM's while the chain brake is locked.

The installation of a chain brake may be mandatory by law or as stipulated by insurance regulations in your area of operation. You should inquire through local government offices, your employer or your local dealer to ensure that your chain saw conforms to the required safety standard.

ECHO chain brakes have been designed and tested to comply with international safety standards as follows.

USA: ANSI Standard B175.1 Safety Requirement for chain saws

#### **A WARNING**

ANSI Standard B175.1 stipulates that the brake shall stop the chain 0.12 seconds at an engine speed of 13,500 r/min. It is the responsibility of the owner/operator to ensure that the brake is serviced, adjusted and tested strictly in accordance with the instructions as detailed here in order to ensure that the brake performance is maintained in compliance with the Standard B175.1.

SAFETY CS-303T


#### **AUTOMATIC CHAIN BRAKE**

Kickback produced from the tip of the guide bar will trip the automatic chain brake. To make sure that the automatic chain brake operates properly, follow these steps:

- 1. Stop the engine.
- 2. Hold the saw with the guide bar approximately 55 cm (22) in.) above a wooden surface. Right hand should hold the rear handle, and left hand should hold the front handle.
- 3. Release the front handle and drop the end of the guide bar against the wooden surface.
- 4. The impact should lock the chain brake.

#### NOTICE

When checking the operation of the automatic chain brake, use a soft surface substance like wood to absorb the impact so the chain is not damaged.

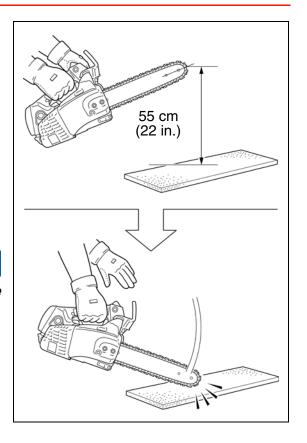

#### **Other Safety Precautions**

6

- 1. Do not operate a chain saw with one hand! Serious injury to the operator, helpers, bystanders, or any combination of these persons may result from one-handed operation. A chain saw is intended for two-handed use.
- 2. Do not operate a chain saw when you are fatigued.
- 3. Use safety footwear, snug-fitting clothing and protective gloves. Wear eye, hearing, and head protection devices.
- 4. Use caution when handling fuel. Move the chain saw at least 3 m (10 feet) from the fueling point before starting the engine.
- 5. Do not allow other persons to be near the chain saw when starting or cutting with the chain saw. Keep bystanders and animals out of the work area.
- 6. Do not start cutting until you have a clear work area, secure footing, and a planned retreat path from the falling tree.
- 7. Keep all parts of your body away from the saw chain when the engine is running.
- 8. Before you start the engine, make sure that the saw chain is not contacting anything.
- 9. Carry the chain saw with the engine stopped, the guide bar and saw chain to the rear, and the muffler away from your body.
- 10. Do not operate a chain saw that is damaged, improperly adjusted, or not completely and securely assembled. Be sure that the saw chain stops moving when the throttle control trigger is released.
- 11. Shut off the engine before setting the chain saw down.
- 12. Use extreme caution when cutting small size brush and saplings because slender material may catch the saw chain and be whipped toward you or pull you off balance.
- 13. When cutting a limb that is under tension, be alert for spring-back so that you will not be struck when the tension in the wood fibers is released.

CS-303T SAFETY

- 14. Keep the handles dry, clean, and free of oil or fuel mixture.
- 15. Operate the chain saw only in well ventilated areas.
- 16. Do not operate a chain saw in a tree unless you have been specifically trained to do so.
- 17. All chain saw service, other than items listed in the Instruction manual maintenance instructions, should be performed by competent service personnel. (For example, if improper tools are used to remove the flywheel or if an improper tool is used to hold the flywheel in order to remove the clutch, structural damage to the flywheel could occur and could subsequently cause the flywheel to burst.)
- 18. When transporting your chain saw, use the appropriate guide bar scabbard.
- 19. Spark arrestor mufflers approved to SAE Standard J335 are standard on ECHO chain saws to reduce the possibility of forest fires. Do not operate the chain saw with a loose or defective muffler. Do not remove the spark arrestor screen.

#### **A WARNING**

- During operation, the muffler or catalytic muffler and surrounding cover become hot.
- Never suspend the saw on a lanyard with the engine running.
- Always use the saw from the right-hand side of your body NEVER from the left side.
- Always wear proper safety clothing to protect your lower body from sharp saw chain and hot muffler.
- Always keep exhaust area clear of flammable debris during transportation or when storing. otherwise serious property damage or personal injury may result.

#### **A WARNING**

Moving parts can amputate fingers or cause severe injuries. Keep hands, clothing and loose objects away from all openings.

- ALWAYS stop engine, disconnect spark plug, and make sure all moving parts have come to a complete stop before removing obstructions, clearing debris, or servicing unit.
- DO NOT start or operate unit unless all guards and protective covers are properly assembled to unit.
- NEVER reach into any opening while the engine is running. Moving parts may not be visible through openings.

#### **A WARNING**

Using improper replacement components or removing safety devices may result in serious or fatal injury.

#### **A WARNING**

Check fuel system for leaks due to fuel tank damage, especially if the unit is dropped. If damage or leaks are found, do not use unit, otherwise serious personal injury or property damage may occur. Have unit repaired by an authorized servicing dealer before using.

SAFETY CS-303T

# **Personal Condition and Safety Equipment**

# **A WARNING**

Users of this product risk injury to themselves and others if the unit is used improperly and/or safety precautions are not followed. Proper clothing and safety gear must be worn when operating unit.

#### **Physical Condition**

Your judgment and physical dexterity may not be good:

- if you are tired or sick,
- · if you are taking medication,
- if you have taken alcohol or drugs.

Operate unit only if you are physically and mentally well.

#### **Eve Protection**

Eye protection that meets ANSI Z87.1, CE, or CSA Z94.3 requirements must be worn whenever you operate the unit.

#### **Hand Protection**

Wear no-slip, heavy duty work gloves to improve your grip on the handles. Gloves also reduce the transmission of machine vibration to your hands.

#### **Breathing Protection**

Wear a face mask to protect against dust.

#### **Hearing Protection**

ECHO recommends wearing hearing protection whenever unit is used.

#### **Proper Clothing**

Wear snug fitting, durable clothing;

- Pants should have long legs, shirts with long sleeves.
- DO NOT WEAR SHORTS,
- DO NOT WEAR TIES, SCARVES, JEWELRY, or clothing with loose or hanging items that could become
  entangled in moving parts or surrounding growth.

Wear sturdy work shoes with nonskid soles;

- DO NOT WEAR OPEN TOED SHOES,
- DO NOT OPERATE UNIT BAREFOOTED.

Wear no-slip, heavy duty work gloves.

Keep long hair away from engine and air intake. Retain hair with cap or net.

#### **Hot Humid Weather**


Heavy protective clothing can increase operator fatigue which may lead to heat stroke. Schedule heavy work for early morning or late afternoon hours when temperatures are cooler.

# **WARNING**

The ignition components of this machine generate an electromagnetic field during operation which may interfere with some pacemakers. To reduce the risk of serious or fatal injury, persons with pacemakers should consult with their physician and the pacemaker manufacturer before operating this machine. In the absence of such information, ECHO does not recommend the use of ECHO products by anyone who has a pacemaker.

#### Vibration and Cold

It is believed that a condition called Raynaud's Phenomenon, which affects the fingers of certain individuals, may be brought about by exposure to vibration and cold. Exposure to vibration and cold may cause tingling and burning sensations, followed by loss of color and numbness in the fingers. The following precautions are strongly recommended, because the minimum exposure, which might trigger the ailment, is unknown.






- Maintain good blood circulation by performing vigorous arm exercises during frequent work breaks, and also by not smoking.
- Limit the hours of operation. Try to fill each day with jobs where operating the unit or other hand-held power equipment is not required.
- If you experience discomfort, redness, and swelling of the fingers followed by whitening and loss of feeling, consult your physician before further exposing yourself to cold and vibration.

#### **Repetitive Stress Injuries**

It is believed that overusing the muscles and tendons of the fingers, hands, arms, and shoulders may cause soreness, swelling, numbness, weakness, and extreme pain in those areas. Certain repetitive hand activities may put you at a high risk for developing a Repetitive Stress Injury (RSI). An extreme RSI condition is Carpal Tunnel Syndrome (CTS), which could occur when your wrist swells and squeezes a vital nerve that runs through the area. Some believe that prolonged exposure to vibration may contribute to CTS. CTS can cause severe pain for months or even years.

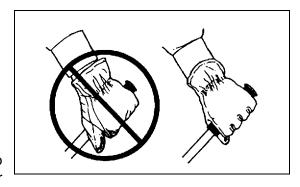

To reduce the risk of RSI/CTS, do the following:

- Avoid using your wrist in a bent, extended, or twisted position. Instead try to maintain a straight wrist position. Also, when grasping, use your whole hand, not just the thumb and index finger.
- Take periodic breaks to minimize repetition and rest your hands.
- Reduce the speed and force with which you do the repetitive movement.
- Do exercise to strengthen the hand and arm muscles.
- Immediately stop using all power equipment and consult a doctor if you feel tingling, numbness, or pain in the fingers, hands, wrists, or arms. The sooner RSI/CTS is diagnosed, the more likely permanent nerve and muscle damage can be prevented.

# **A** DANGER

All over head electrical conductors and communications wires can have electricity flow with high voltages. This unit is not insulated against electrical current. Never touch wires directly or indirectly, otherwise serious injury or death may result.

#### **A** DANGER

Do not operate this product indoors or in inadequately ventilated areas. Engine exhaust contains poisonous emissions and can cause serious injury or death.

# **Symbols and Signs**

Symbol form/shape	Symbol description/application	Symbol form/shape	Symbol description/application
<b>③</b>	WARNING!! Read and follow all safety precaution in the instruction manual. Failure to follow instructions could result in serious personal injury.	1	Choke control "Cold Start" position (choke closed)
	Wear eyes, ears and head protection	+0	Oil and gasoline mixture
	Tip contact may cause the guide bar to move suddenly upward and backward, which may cause serious injury		Chain oil fill
	Contact of the guide bar tip with any object should be avoided	(O + O	Chain oiler adjustment
	Both of the operator's hands must be used to operate the chain saw		Purge pump
	Hot Surface		Carburetor Adjustment - Low speed mixture
(a)	Chain brake operation	Н	Carburetor Adjustment - High speed mixture
STOP	Emergency stop	T	Carburetor Adjustment - Idle speed

CS-303T SAFETY

# **Manual Safety Symbols and Important Information**

Throughout this manual and on the product itself, you will find safety alerts and helpful, informational messages preceded by symbols or key words. The following is an explanation of those symbols and key words and what they mean to you.

#### **▲** DANGER

The safety alert symbol accompanied by the word "DANGER" calls attention to an act or condition which WILL lead to serious personal injury or death if not avoided.

#### **▲ WARNING**

The safety alert symbol accompanied by the word "WARNING" calls attention to an act or condition which CAN lead to serious personal injury or death if not avoided.

#### **A** CAUTION

The safety alert symbol accompanied by the word "CAUTION" calls attention to an act or condition which may lead to minor or moderate personal injury if not avoided.

#### NOTICE

The enclosed message provides information necessary for the protection of the unit.

Note: This enclosed message provides tips for use, care and maintenance of the unit.




CIRCLE AND SLASH SYMBOL

This symbol means the specific action shown is prohibited. Ignoring these prohibitions can result in serious or fatal injury.

DESCRIPTION CS-303T

# **DESCRIPTION**

Locate the safety decal(s) on your unit. Make sure the decal(s) is legible and that you understand and follow the instructions on it. If a decal cannot be read, a new one can be ordered from your ECHO dealer. See PARTS ORDERING instructions for specific information.

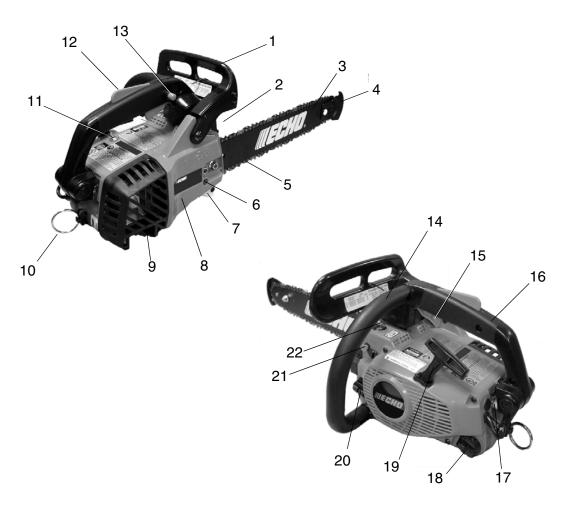



⚠O uso inadequado pode causar acidentes graves e danos a saúde.

El uso inadecuado puede causar accidentes graves y/o daños a la salud.

⚠Improper use can cause serious accidents and/or injuries.

CS-303T DESCRIPTION

1. Chain Brake Lever/Front hand guard - Guard between the front handle and the saw chain for protecting the hand from injuries and aiding in control of the chain saw if the hand slips off the handle.

- 2. Air cleaner cover Covers air cleaner.
- 3. **Guide bar** The part that supports and guides the saw chain.
- 4. **Tip guard** Anti-kickback device attached to the bar nose.
- 5. Saw chain Chain, serving as a cutting tool.
- 6. Chain tension adjuster Device to adjust chain tension.
- 7. Chain catcher A projection designed to reduce the risk of the operator's right hand from being hit by a chain which has broken or derailed from the guide bar during cutting.
- 8. Chain Brake/Sprocket Guard Protective cover for the chain brake, guide bar, saw chain, clutch, and sprocket when the chain saw is in use.
- 9. **Muffler Cover** Cover the muffler to protect operator from hot surface of muffler.
- 10. Safety Lanyard If working off the ground the operator must be trained in safe climbing techniques and use of all recommended safety equipment.
- 11. Control lever (choke/ignition switch) Device for connecting and disconnecting the ignition system and allowing the engine to be started or stopped. Lever also activates choke.
- 12. Throttle trigger lockout A safety lever which must be depressed before the throttle trigger can be activated. Prevents accidental operation of the throttle trigger.
- 13. Throttle lock button Device for temporality setting the throttle in a partially open position to aid starting.
- 14. Front support handle (for the left hand) Support handle located at the front of the engine housing.
- 15. Throttle trigger Device activated by the operator's finger, for controlling the engine speed. Also releases fast idle throttle latch when squeezed and released immediately after starting engine.
- 16. Throttle control handle (for the right hand) Handle located above the engine housing.
- 17. **Spark plug** Provides spark to ignite fuel mixture.
- 18. Oil tank cap For closing the oil tank.
- 19. Starter handle Pull handle slowly until starter engages then quickly and firmly. When engine starts, return handle slowly. DO NOT let handle snap back or damage to unit will occur.
- 20. Fuel tank cap For closing the fuel tank.
- 21. Choke control knob Device for enriching the fuel/air mixture in the carburetor to aid cold starting. Also activates fast idle throttle latch.
- 22. Purge pump When starting engine, push purge pump 3 or 4 times.

#### **CHAIN SAW TERMS**

- 1. Fast Idle -Throttle setting that causes engine to operate at a faster speed for easier starting.
- 2. **Throttle Latch** Device that sets idle speed to fast idle when choke control is operated.
- 3. **Chain Brake** Stops the saw chain.
- 4. Drive Sprocket Drives saw chain.
- 5. Clutch Turns drive sprocket when engine rpm is fast enough to provide the power needed for cutting.

DESCRIPTION CS-303T

# **Preparation For Use**

# **WARNING**

Saw Chain is sharp! Always wear gloves when handling assembly, otherwise serious personal injury may result.


Note: The machine may be delivered with guide bar, tip guard, and saw chain separated. Install guide bar, tip guard, and saw chain as follows.

For more information scan this QR code.

#### **Tip Guard To Bar Instructions**

Tool Needed: Two 11 mm (7/16 in.) Wrenches. For saws with Tip Guard P/N 2894901 and Symmetrical or Asymmetrical Low-Kick type (Double Guard) guide bars.

- 1. Install bolt (A) in *rear* hole (B) of tip guard and through front hole (C) in guide bar.
- 2. **IMPORTANT:** Dimple (D) in tip guard must engage recess (E) in guide bar.
- 3. Securely tighten nut (F) and bolt (A).

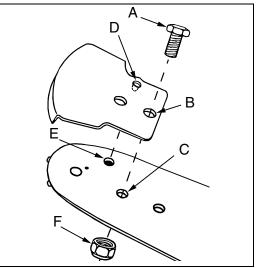

#### Guide Bar And Saw Chain-Install/remove

- 1. Remove air cleaner cover and disconnect spark plug lead.
- 2. Move chain brake lever (Front hand guard) fully rearward to unlock chain brake.
- 3. Remove sprocket guard nuts and remove sprocket guard (D).
- 4. Remove guide bar and saw chain if necessary.


14

Note: See "MAINTENANCE AND CARE" instructions for guide bar, sprocket, and saw chain maintenance.

 Mount guide bar (B) on studs, and slide toward sprocket to make saw chain installation easier. Install saw chain (A) around sprocket and guide bar as shown, with cutters on top of guide bar facing forward.



For more information scan this QR code.

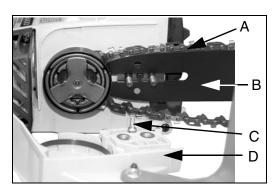

6. Install sprocket guard over guide bar studs. Ensure chain tension adjuster pin (C) fits into the guide bar adjuster hole, brake band is positioned around clutch drum. Tighten sprocket guard nuts finger tight.


7. Turn saw over and check brake band (O) for correct position around clutch drum (P). If brake band is not in place around drum, remove sprocket guard and reinstall. Tighten guide bar nuts finger tight.

#### **WARNING**

Improper sprocket guard assembly can result in serious injury, and will cause severe saw damage if unit is started. Never start or operate saw if brake band is not in place on

clutch drum. Always check chain brake operation after replacing guard. Do not use saw if chain brake does not function properly.

8. Adjust saw chain tension, as instructed in "Adjustment, Chain Tension".

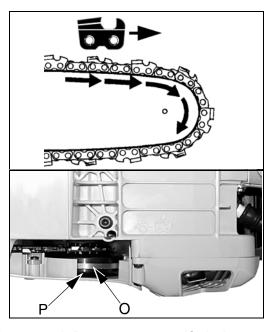

#### **Adjusting Chain Tension**

#### **NOTICE**

Always loosen sprocket guard nuts before turning the chain tension adjuster, otherwise the sprocket guard and tensioner will be damaged.

- 1. Remove air cleaner cover and disconnect spark plug lead.
- 2. Loosen sprocket guard nuts (H).
- 3. Hold the bar nose up, and turn the adjuster screw (J) clockwise until chain contacts underside of the bar.
- 4. Tighten nuts with the bar nose held up.
- 5. Pull the chain around the bar by hand. Loosen the adjustment if you feel tight spots.

#### **NOTICE**

Tighten guide bar nuts to 4.5 – 7.5 N•m (40 – 65 in•lbf) DO NOT over-tighten nuts. Damage to saw may result.


6. Keep chain properly tensioned at all times.


Note: All chains require frequent adjustments.

7. Replace spark plug lead and air cleaner cover.



For more information scan this QR code.

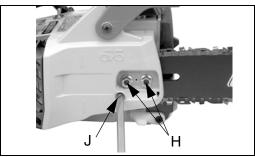

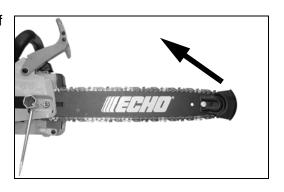

OPERATION CS-303T

#### **OPERATION**

#### **Fuel**

#### **NOTICE**

Use of unmixed, improperly mixed, or fuel older than 90 days, (stale fuel), may cause hard starting, poor performance, or severe engine damage and void the product warranty. Read and follow instructions in the Storage section of this manual.

#### **A WARNING**

Fuel containing more than 25% ethanol is NOT approved for use in ECHO 2-stroke gasoline engines. Fuel containing more than 25% ethanol may cause performance problems, loss of power, overheating, fuel vapor lock, and unintended machine operation, including, but not limited to, improper clutch engagement. Fuel containing more than 25% ethanol may also cause premature deterioration of fuel lines, gaskets, carburetors and other engine components.

#### **Fuel Requirements**

**Gasoline** - Use 89 Octane (mid grade or higher) gasoline known to be good quality. Gasoline may contain up to 25% Ethanol. Gasoline containing methanol (wood alcohol) is NOT approved.

**Two Stroke Oil** - A two-stroke engine oil meeting ISO-L-EGD (ISO/CD 13738) and J.A.S.O. <u>FD</u> Standards must be used. Echo brand premium Power Blend X <sup>™</sup> Universal 2-Stroke Oil meets these standards. Engine problems due to inadequate lubrication caused by failure to use an ISO-L-EGD (ISO/CD 13738) and J.A.S.O. <u>FD</u> certified oil, such as Echo premium Power Blend X <sup>™</sup>, will void the two-stroke engine warranty.

# NOTICE

Echo premium Power Blend  $X^{TM}$  Universal 2-Stroke Oil may be mixed at 50:1 ratio for application in all Echo engines sold in the past regardless of ratio specified in those manuals.

#### **Handling Fuel**

#### **A** DANGER

Fuel is VERY flammable. Use extreme care when mixing, storing or handling, or serious personal injury may result.

- Use an approved fuel container.
- DO NOT smoke near fuel.
- · DO NOT allow flames or sparks near fuel.
- Fuel tanks/cans may be under pressure. Always loosen fuel caps slowly allowing pressure to equalize.
- NEVER refuel a unit when the engine is HOT or RUNNING!
- DO NOT fill fuel tanks indoors. ALWAYS fill fuel tanks outdoors over bare ground.
- DO NOT overfill fuel tank. Wipe up spills immediately.
- Securely tighten fuel tank cap and close fuel container after refueling.

 Inspect for fuel leakage. If fuel leakage is found, do not start or operate unit until leakage is repaired.

• Move at least 3m (10 ft.) from refueling location before starting the engine.

#### Mixing Instructions

- 1. Fill an approved fuel container with half of the required amount of gasoline.
- 2. Add the proper amount of 2-stroke oil to gasoline.
- 3. Close container and shake to mix oil with gasoline.
- 4. Add remaining gasoline, close fuel container, and remix.

Fuel to Oil Mix - 50:1 Ratio				
U.S		METR	IC	
GAS	OIL	GAS	OIL	
Gallons	Fl. oz.	Liter	CC.	
1 2 5	2.6 5.2 13	4 8 20	80 160 400	

#### NOTICE

Spilled fuel is a leading cause of hydrocarbon emissions. Some states may require the use of automatic fuel shut-off containers to reduce fuel spillage.

#### After use

 DO NOT store a unit with fuel in its tank. Leaks can occur. Return unused fuel to an approved fuel storage container.

**Storage** - Fuel storage laws vary by locality. Contact your local government for the laws affecting your area. As a precaution, store fuel in an approved, airtight container. Store in a well-ventilated, unoccupied building, away from sparks and flames.

#### NOTICE

Stored fuel ages. Do not mix more fuel than you expect to use in thirty (30) days, ninety (90) days when a fuel stabilizer is added.

#### **NOTICE**


Stored two-stroke fuel may separate. ALWAYS shake fuel container thoroughly before each use.

#### **Chain Lubricant**

Note: Cap indication - Fuel/oil tanks are indicated by the following illustrations

Proper lubrication of the chain while in operation reduces friction between the chain and the guide bar to a minimum and assures a longer service life.

- Use bar and chain oil of high quality for this purpose.
- · Do not use used or reclaimed oil to avoid various oiler problems.
- Use ECHO bar and chain oil.
- When ECHO bar and chain oil is not available: Use motor oil. etc.
- Use bar and chain oil of the following grades:
  - SAE No. 30....in summer

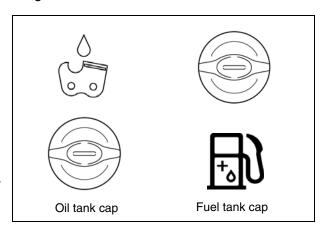

OPERATION CS-303T

- SAE No. 10....in winter or when cutting resinous trees.
- When refueling, also refill chain oil.

#### **WARNING**

Moving parts can amputate fingers or cause severe injuries. Keep hands, clothing and loose objects away from all openings. Always stop engine, disconnect spark plug, and make sure all moving parts have come to a complete stop before removing obstructions, clearing debris, or servicing unit.

### **WARNING**

Engine exhaust IS HOT, and contains Carbon Monoxide (CO), a poison gas. Breathing CO can cause unconsciousness, serious injury, or death. Exhaust can cause serious burns. ALWAYS position unit so that exhaust is directed away from your face and body.

#### **WARNING**

Operation of this equipment may create sparks that can start fires. This unit is equipped with a spark arrestor to prevent discharge of hot particles from the engine. Metal cutters can also create sparks if the cutter strikes rocks, metal, or other hard objects. Contact local fire authorities for laws or regulations regarding fire prevention requirements.

# **Starting Cold Engine**

# **WARNING**

Make sure the bar and chain are free from any obstruction when starting the chain saw.


- 1. Move chain brake lever fully forward to lock chain brake before starting.
- 2. Fill the fuel tank with fuel mixture. Do not over fill.
- 3. Fill the chain oil tank with lubricant. Do not over fill.
- 4. Lay unit on a flat, clear area and keep bar and chain clear of all obstacles.
- 5. Turn switch (A) to "RUN" position (I).
- 6. Pull choke (B) all the way out (close choke) position.
- 7. Push purge bulb (C) 10 times.
- 8. Pull starter handle several times until first starting sound is heard. (Secure unit on ground with your knee or foot) (5-6 pulls maximum).
- 9. Push choke (B) all the way in (open choke) position.
- 10. Pull starter handle again.

Note: If engine does not start after 5 pulls, repeat instructions.

Note: Do not increase engine speed while chain brake is locked. Severe brake damage will result.



For more information scan this QR code.

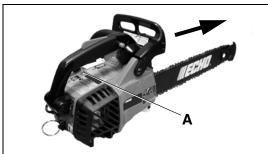




# **Starting Hard to Start Engine**

#### **WARNING**

Clutch engages and chain may rotate when engine is started with throttle lock button engaged. Do not start engine before chain brake is locked.

- 1. Ensure that there is fuel and chain oil in the tanks.
- 2. Move chain brake lever fully forward to lock chain brake before starting.
- 3. Lay unit on a flat, clear area and keep bar and chain clear of all obstacles.



- 5. While depressing the throttle lock button, release the throttle trigger and then release the lock button.
- 6. Move ignition switch (A) to "RUN" position.
- 7. Pull starter handle.

Note: Do not pull starter rope out to the maximum possible position.

Do not allow recoil handle to snap back against the casing.

#### **A** CAUTION

- After starting the engine, immediately squeeze and then release throttle trigger to release throttle lock button, otherwise severe brake damage may occur.
- Never use throttle lock button for cutting.
- Use the throttle lock button only in starting.


Note: Do not increase engine speed while chain brake is locked. Severe brake damage will result.

# Starting Warm Engine

#### **A WARNING**

Make sure the bar and chain are free from any obstruction when starting the chain saw.

- 1. Ensure that there is fuel and chain oil in the tanks. (If fuel tank was emptied during previous operation, refill tank and push purge bulb 10 times.)
- 2. Move chain brake lever fully forward to lock chain brake before starting.
- 3. Lay unit on a flat, clear area and keep bar and chain clear of all obstacles.
- 4. Turn switch (A) to "RUN" position (I).
- 5. Pull starter handle.
- 6. Choke may be used if necessary, but be sure to push it back on first starting sound.

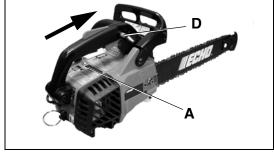



X7503208200

OPERATION CS-303T

Note: If engine does not start after 5 pulls, use cold start procedure.

Note: Do not increase engine speed while chain brake is locked. Severe brake damage will result.

# Running

#### **A WARNING**

The saw chain should not move at idle, otherwise serious personal injury may result.

Note: If saw chain moves adjust carburetor according to "Carburetor Adjustment" instructions in this manual, or see your dealer.

- 1. After engine starts, allow it to return to idle and warm up before using.
- 2. Move chain brake lever fully rearward to unlock chain brake.
- 3. Squeeze throttle control lockout then gradually squeeze throttle trigger to increase engine speed.
- 4. The chain starts moving when the engine reaches clutch engagement speed (see technical data page).
- 5. Confirm proper acceleration and lubrication of chain and bar.
- 6. Do not run the engine at high speed unnecessarily.
- 7. Be sure that saw chain stops moving when throttle trigger is released.

# **Stopping**

- 1. Release throttle trigger and turn switch (A) to STOP (O) position.
- 2. Move chain brake lever fully forward to lock chain brake


Note: If engine does not stop, pull choke control knob out fully to stop engine.


Return the unit to your authorized ECHO dealer to check and repair stop switch before starting the engine again.

# **Checking Chain Tension**

Chain tension should be checked frequently during work and corrected as necessary.



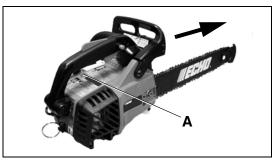

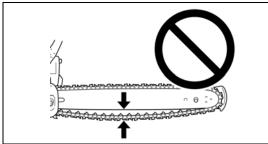


#### **A** CAUTION

Do not operate with a loose chain.

#### **Chain Lubrication Test**

Hold the chain just above a dry surface and open the throttle to half speed for 30 seconds.

A thin line of "thrown" oil should be seen on the dry surface.

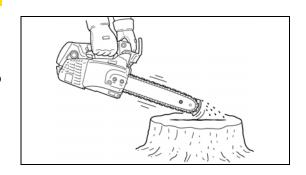

# **Cutting Instructions**

#### General

# **A WARNING**


- This chain saw is designed for cutting wood or wood products. Do not cut solid metal, sheet metal, plastic or any non-wood materials.
- Read the ECHO "CHAIN SAW SAFETY MANUAL" included with your chain saw for additional cutting and safety instructions.
- Wear suitable hearing protection such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.
- Do not let the tip of the bar touch anything while the engine is running. At cutting speed the chain is moving at a high rate of speed. Should the tip contact a limb or log while the chain is moving, the tip will be pushed upward with considerable force. This is known as kickback. Avoid it!


In all circumstances the operation of the chain saw is a one-man job. It is difficult at times to take care for your own safety, so don't assume the responsibility for a helper as well. After you have learned the basic techniques of using the saw, your best aid will be your own good common sense.


The accepted way to hold the saw is to stand to the left of the saw with your left hand on the front handlebar and your right hand on the rear handle so you can operate the throttle trigger with your right index finger. Before attempting to fell a tree, cut some small logs or limbs. Become thoroughly familiar with the controls and the responses of the saw.



For more information on scan this QR code.

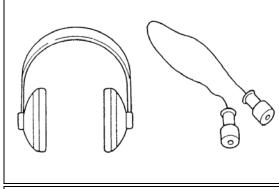

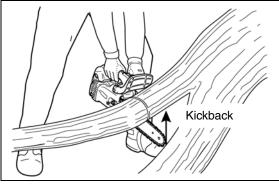


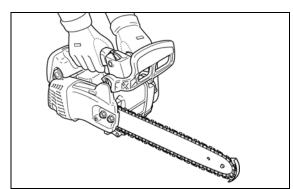

OPERATION CS-303T

Start the engine, see that it is running properly. Squeeze the trigger to open the throttle wide open and start the cut. If the chain is properly sharpened, the cutting should be relatively effortless. It is not necessary to press down hard to make the saw cut. Pushing the saw too hard will slow the engine and cutting will actually be more difficult.

Note: Some material may adversely affect the housings of your ECHO chain saw.(Example: Palm Tree Acid, fertilizer, etc.) To avoid housing deterioration, carefully remove all packed saw dust around clutch and guide bar area and wash with water. Coat metal parts with light oil.

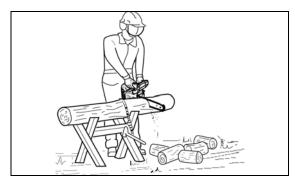

#### **Felling the Tree**

#### **A WARNING**

A falling tree can seriously damage anything it may hit - a car, a house, a fence, a power line, or another tree. There are ways to make a tree fall where you want it, so first decide where that is!


Before cutting, clear the area around the tree. You will need good footing while working and you should be able to work the saw without hitting any obstacles. Next, select a path of retreat. When the tree begins to fall you should retreat away from the direction of fall at a 45-degree angle and at least 3 m (10 feet) from the trunk to avoid the trunk kicking back over the stump.


Begin the cut on the side to which the tree is to fall. Cut a notch about 1/3 of the way into the tree. The position of this notch is important since the tree will try to fall "into" the notch. The felling cut is made on the side opposite the notch and at a level about 5 cm (2 in.) above the bottom of the notch. Do not try to cut through to the notch with the felling cut. The remaining wood between the notch cut and felling cut about 5 cm (2 in.) will act as a hinge when the tree falls, guiding it in the desired direction. When the tree starts to fall, kill the engine, place the saw on the ground and make your retreat guickly.

To fell big trees with a diameter exceeding twice the bar length, start the notching cuts from one side and draw the saw through to the other side of the notch. Start the back cut on one side of the tree, pivoting the saw through to form the desired hinge on that side. Then remove the saw for the second cut. Insert the saw in the first cut, very carefully so as not to cause kickback. The final cut is made by drawing the saw forward in the cut to reach the hinge.



For more information on scan this QR code.

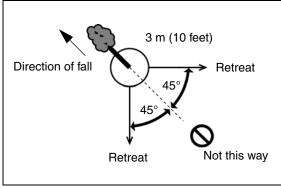

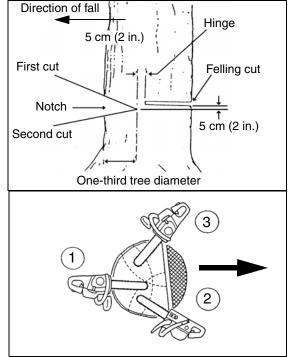

#### Limbing

Limbing a fallen tree is much the same as bucking.

Never stand on the tree that you are limbing. When limbing, caution is the word. Be careful of the tip touching other limbs. Always use both hands.

Don't cut with the saw overhead or aligned vertically with your body. If the saw should kickback, you may not have enough control to prevent possible injury.




#### **Bucking**

Bucking is the sawing of a log or fallen tree into smaller pieces. There are a few basic rules which apply to all bucking operations.


- Keep both hands on the handles at all times.
- Support logs if possible.
- When cutting on a slope or hillside, always stand uphill.

Keep in mind that the wood is heavy and that it will bend and pinch the saw if improperly supported. The trunk will weaken at the point where you make the cut unless the tree is lying on perfectly flat ground or supported as shown. If you make the cut with the tree on the ground, don't let the saw's chain dig into the earth; it is harmful for the saw, and you stand a good chance of being struck by flying debris.

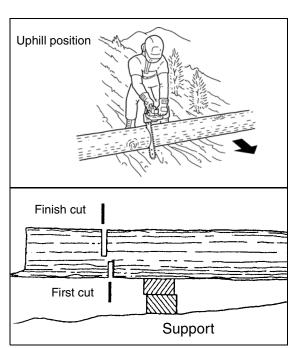

OPERATION CS-303T

To cut the trunk, use the bucking and two-cut sequence shown. The first cut should be no deeper than one-third the trunk diameter.

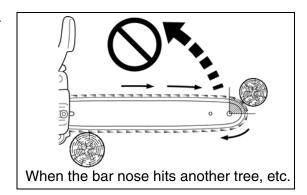

#### **Chain And Guide Bar Combination**

The following combinations are recommended for model CS-303T.

Low	Kickback Guide Bar	Low Kickback Saw Chain			Kick Guard		
Length	Bar P/N	Chain P/N	Links	Туре	Pitch	Gauge	Echo P/N (OEM P/N)
12"	12A0CD3745	91PX45CQ	45	91PX	2/9"	0.050	2894901
14"	14A0CD3752	91PX52CQ	52	SIFA	3/8"	0.050	28949

#### WARNING

Use of replacement saw chain and/or guide bar other than that specified, or operation without the "tip guard" in place, may cause severe kickback resulting in serious injury. Only use saw chain designated as, "LOW-KICKBACK," that meets ANSI B175.1 or CSA Z62.1, .3 Standard when tested on the representative sample of chain saws below 3.8 C.I.D., and Echo guide bar specified.

#### **NOTICE**

Chain and guide bar gauge size must be identical. Use Bar/Chain combinations shown in table above.

#### **NOTICE**

If your tip guard is damaged or lost, contact your Echo dealer for a replacement. For the name of the Echo dealer nearest you, Call: 1-800-432-ECHO (3246) or on the web at www.echo-usa.com.

Refer to your Chain Saw Safety Manual for tip guard application information.

#### **Guide Bar**

#### (Low-kickback)

Replacement guide bars.

The following guide bars may be considered to have equivalent kickback energy.

- Sprocket nose guide bars of the same length and nose radius, same pitch and having the same number of teeth.
- Hard nose guide bars of the same length and nose radius as a sprocket nose bar.

#### Saw Chain

(Low-kickback)

**CS-303T OPERATION** 

# **A** CAUTION

Do not use replacement saw chain unless it has been designated as meeting ANSI B175.1 or CSA Z62.1, .3 kickback performance requirements, when tested on the representative sample of chain saws below 3.8 c.i.d. specified in ANSI B175.1 or CSA 62.1, .3.

Note: LOW KICKBACK SAW CHAIN meets the kickback performance requirements of ANSI B175.1 or CSA 62.1, .3 (safety requirements for gasoline-powered chain saws).

MAINTENANCE CS-303T

#### **MAINTENANCE**

# **WARNING**

Moving parts can amputate fingers or cause severe injuries. Keep hands, clothing and loose objects away from all openings. Always stop engine, disconnect spark plug, and make sure all moving parts have come to a complete stop before removing obstructions, clearing debris, or servicing unit. Allow unit to cool before performing service. Wear gloves to protect hands from sharp edges and hot surfaces.

Your ECHO unit is designed to provide many hours of trouble free service. Regular scheduled maintenance will help your unit achieve that goal. If you are unsure or are not equipped with the necessary tools, you may want to take your unit to an ECHO Service Dealer for maintenance. To help you decide whether you want to DO-IT-YOURSELF or have the ECHO Dealer do it, each maintenance task has been graded. If the task is not listed, see your ECHO Dealer for repairs.

#### Skill Levels

**Level 1** = Easy to do. Common tools may be required.

**Level 2** = Moderate difficulty. Some specialized tools may be required.

#### **Maintenance Intervals**

COMPONENT/SYSTEM	MAINTENANCE PROCEDURE	REQ'D SKILL LEVEL	DAILY OR BEFORE USE	EVERY REFUEL	3 MONTHS OR 90 HOURS	YEARLY 600 HOURS
Air Filter	Inspect/Clean	1	I/C*		R *	
Automatic Oiler	Inspect/Adjust	1	I			
Oil Filter	Inspect/Replace	1	I		I/C*	
Fuel System	Inspect/Replace	1	I (1) *	l (1) *		
Fuel Filter	Inspect/Replace	1			l*	I/R*
Fuel Cap Gasket	Replace	1			l*	R *
Guide Bar & Sprocket Nose	Inspect/Clean/Lubricate	1	I/C*	ı		
Saw Chain	Inspect/Sharpen/Replace/ Tensioning	2	I *			
Sprocket	Inspect/Replace	2	l *			
Spark Plug	Inspect/Clean	1			I/C/R*	
Cooling System	Inspect/Clean	2	I/C			
Muffler Spark Arrestor	Inspect/Clean/Replace	2			I/C/R*	
Cylinder Exhaust Port	Inspect/Clean/Decarbon	2			I/C	
Recoil Starter Rope	Inspect/Clean	1	I/C*			
Screws/Nuts/Bolts	Inspect/Tighten/Replace	1	I *			

#### MAINTENANCE PROCEDURE LETTER CODES: I = INSPECT, R = REPLACE, C = CLEAN

**IMPORTANT NOTE** - Time intervals shown are maximum. Actual use and your experience will determine the frequency of required maintenance.


#### **MAINTENANCE PROCEDURE NOTES:**

(1) Low evaporative fuel tanks DO NOT require regular maintenance to maintain emission integrity.

<sup>\*</sup> Replacement is recommended based on the finding of damage or wear during inspection.

#### Air Filter

- 1. Check periodically.
- 2. Close choke (Cold start position | ... ). This prevents dirt from entering the carburetor throat when the air filter is removed. Brush accumulated dirt from air cleaner area.
- 3. Remove air cleaner cover. Brush dirt from inside cover.
- 4. Remove air filter and lightly brush debris from filter. Replace filter if it is damaged, fuel soaked, very dirty, or the rubber sealing edges are deformed.
- 5. Install air filter cover.

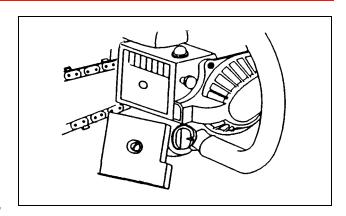

# **Spark Plug**

- Check periodically.
- The standard spark gap is 0.65 mm (0.026 in.).
- Fastening torque:13 to 17 Nem (112 to 150 inelbf).
- 1. Remove air cleaner cover and remove spark plug.
- 2. Correct the spark gap if it is wider or narrower than the standard gap.


# 0.65 mm (0.026 in.)

# **Check Fuel System**

- Check before every use.
- After refueling, make sure fuel does not leak from around fuel pipe, fuel grommet or fuel tank cap.
- In case of fuel leakage there is a danger of fire. Stop using the machine immediately and request your dealer to inspect or replace.

#### **Fuel Filter**

- · Check periodically.
- Do not allow dust to enter fuel tank.
- A clogged filter will cause difficulty in starting engine or abnormalities in engine performance.
- 1. Using a wire bent into the shape of a hook, pull strainer out through gas port, and inspect strainer.
- 2. If the strainer is dirty, clean with suitable cleaning fluid.
- 3. When the inside of the fuel tank is dirty, rinsing the tank out with gasoline can clean it.

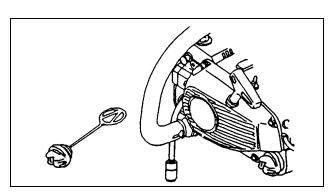


**MAINTENANCE** CS-303T

Note: Federal EPA regulations require all model year 2012 and later gasoline powered engines produced for sale in the United States to be equipped with a special low permeation fuel supply hose between the carburetor and fuel tank. When servicing model year 2012 and later equipment, only fuel supply hoses certified by EPA can be used to replace the original equipment supply hose. Fines up to \$37,500 may be enforced for using an un-certified replacement part.

#### **Automatic Oiler**

- The discharge volume of the automatic oiler is adjusted to approximately 4 mL/min at 7000 r/min, prior to shipment from factory.
- Always check oil discharge when in use.
- Turn adjusting screw (D) counter-clockwise to increase oil volume, clockwise to decrease oil volume.
- Do not turn the adjusting screw beyond the maximum or minimum limit of volume adjustment.

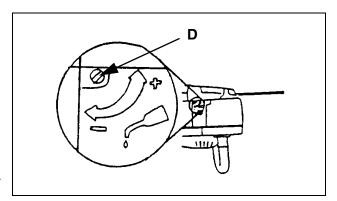



#### Oil Filter

- · Check periodically.
- Do not allow dust to enter into oil tank.
- Clogged oil strainer will affect the normal lubricating system.
- 1. Using a wire bent into the shape of a hook, pull strainer out through oil port and inspect strainer.
- 2. If the strainer is dirty, clean with suitable cleaning fluid.
- 3. If the inside of the oil tank is dirty, rinse with suitable cleaning fluid.
- 4. Install strainer into lower front of oil tank to ensure proper chain lubrication.

#### **Guide Bar**

- 1. Clean before using.
- 2. Clean the groove (A) of the guide bar with a small screwdriver.
- 3. Clean oil holes (B) with a wire.
- 4. Invert guide bar periodically.
- 5. Clean the bar mount area before installing of the bar.

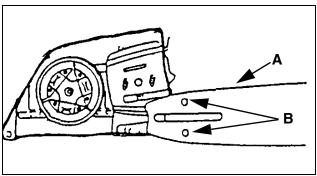


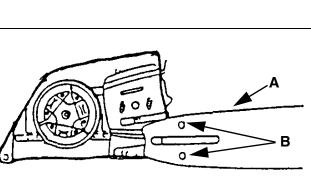


**CS-303T MAINTENANCE** 

# **Sprocket**

 A damaged sprocket will cause premature damage or wear of saw chain.



• Check sprocket when you install new chain. Replace it if

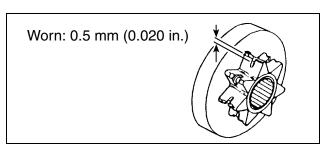


#### **NOTICE**

Some tree sap and resins are corrosive. Thoroughly wash the guide bar and sprocket areas after each use, then coat metal parts with light oil.

# **Cooling System Cleaning**

- Check periodically.
- Clogged fins will result in poor engine cooling.
- 1. Remove muffler and starter.
- 2. Use compressed air or wooden tool to remove dirt and dust from between fins to let cooling air pass easily.

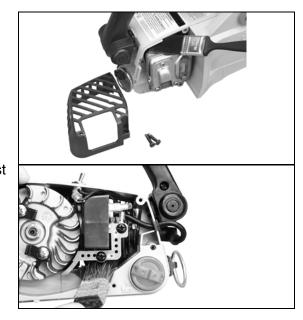

# **Spark Arrestor Muffler**

- The spark arrestor muffler controls the exhaust noise and prevents hot, glowing particles of carbon from leaving the muffler.
- Make sure the spark arrestor screen is in good repair and properly seated in the muffler.
- Certain internal combustion engines operated on forest, brush, and/or grass-covered areas in the states of Washington, Oregon, Idaho, California, Minnesota, New Jersey and Maine, are required to be equipped with a spark arrestor.

This requirement also applies to all U.S. Forest Service lands. In some of these areas, the spark arrestor system must be certified per USDA Forest Service Regulation SAE J335.

Check with your local or state authorities for specific regulations in your area. Failure to follow these requirements is a violation of the law.

MAINTENANCE CS-303T

# **Spark Arrestor Screen**

#### **NOTICE**

Carbon deposits in muffler will cause a drop in engine output and overheating. Spark arrestor screen must be checked periodically.

- 1. Remove muffler cover.
- 2. Remove spark arrestor screen cover and screen from muffler body.
- 3. Clean carbon deposits from muffler components.

Note: When cleaning carbon deposit, be careful not to damage the catalytic element inside muffler.

- 4. Replace screen if it is cracked, plugged, or has holes burned through.
- 5. Assemble components in reverse order.



Level 2.

Parts Required: As needed: Muffler gasket

- 1. Remove spark plug lead.
- 2. Remove muffler cover.
- 3. Place piston at top dead center.
- 4. Remove muffler. Check parts for wear or damage, and replace if necessary.
- 5. Use a wood or plastic scraping tool to clean deposits from cylinder exhaust port.

#### **NOTICE**

Never use a metal tool to scrape carbon from the exhaust port. Do not scratch the cylinder or piston when cleaning the exhaust port. Do not allow carbon particles to enter the cylinder.

- 6. Install muffler. Tighten bolts to 9-11 N•m (80-95 in•lbf).
- Connect spark plug lead.
- 8. Start engine, and allow unit to warm up at idle for several minutes.
- 9. Stop engine, and re-tighten mounting nuts to 9-11 N•m (80-95 in•lbf).
- 10. Install muffler cover.
- 11. Start engine and check for exhaust leaks between muffler and cylinder head. Stop engine if leak is found and correct problem before operating chain saw.



CS-303T **MAINTENANCE** 

# **Carburetor Adjustment**

#### **Engine Break-In**

New engines must be operated a minimum duration of two tanks of fuel break-in before carburetor adjustments can be made. During the break-in period your engine performance will increase and exhaust emissions will stabilize. Idle speed can be adjusted as required.

#### **High Altitude Operation**

This engine has been factory adjusted to maintain satisfactory starting, emission, and durability performance up to 1,100 feet above sea level (ASL) (96.0 kPa). To maintain proper engine operation and emission compliance above 1,100 feet ASL the carburetor may need to be adjusted by an authorized ECHO service dealer.

#### NOTICE

If the engine is adjusted for operation above 1,100 feet ASL, the carburetor must be re-adjusted when operating the engine below 1,100 feet ASL, otherwise severe engine damage may result.

#### Level 2.

Parts Required: None

# **WARNING**

Always operate unit in a clear work area. Keep hands clear of moving parts during adjustment otherwise serious bodily injury may occur.

Before adjustment make sure that:


- Check for correct spark plug (BPM-8Y P/N 15901019830) and gap: .026 in (0.65 mm).
- The air filter element is clean and properly installed.
- The muffler spark arrestor screen and exhaust port are clear of carbon.
- The fuel lines, tank vent, and fuel filter are in good condition and clear of debris.
- The fuel is fresh (> 89 octane: RON+MON/2) and properly mixed at 50: 1 with "ISO L-EGD" or "JASO-FD" 2-stroke oil.
- Make sure the bar and chain are properly adjusted.

Start and run engine for 3 minutes. Adjust idle speed screw to 3,050 +/- 100 rpm. If engine does not run correctly after this adjustment, adjust carburetor.

**MAINTENANCE CS-303T** 


1. Turn H mixture needle clockwise (CW) until lightly seated. Then turn H mixture needle (CCW) 1 1/8 turns. Turn L mixture needle (CW) until lightly seated. Then turn L mixture needle (CCW) 1 1/16 turns.

- 2. Start engine, turn "Idle" speed adjustment screw "T" CW until the saw chain begins to move, then turn screw out CCW until the saw chain stops moving. Turn screw out, CCW, an additional 1/4 turn.
- 3. Adjust L mixture needle to obtain 3050 RPM.
- 4. Adjust H mixture needle and obtain 12150 RPM
- 5. When final adjustment is completed, the engine should idle, accelerate smoothly, and attain (WOT) per above specification.

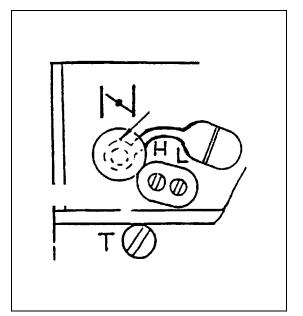

CS-303T **MAINTENANCE** 

# **Setting The Saw Chain**

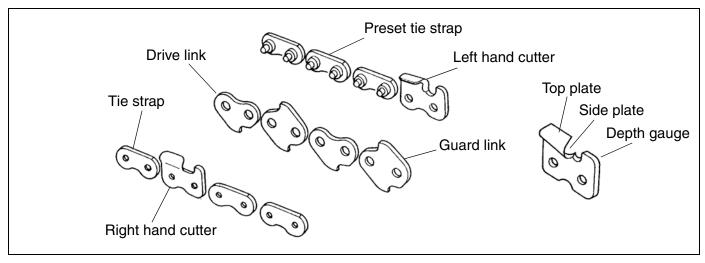

Important points for proper maintenance of saw chain:


- · Keep the cutters sharp at all times.
- Keep the left and the right cutters properly aligned.
- · Note that blunt or irregular cutters will result in poor cutting performance, increased vibration of chains and premature breakage of the saw chain.
- Drive link serves to remove sawdust from the groove of the guide bar. Keep the lower edge of the drive link sharp where indicated.


# **Setting Saw Chain**

- For setting saw chain, round file (4.0 mm dia. 5/32 in.) and flat file are used.
- Push file as shown.
- To keep correct position and correct angle, use a file holder.
- Hold the file horizontally.



For more information scan this QR code.

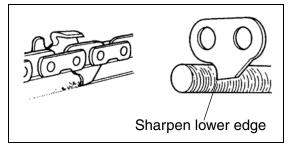

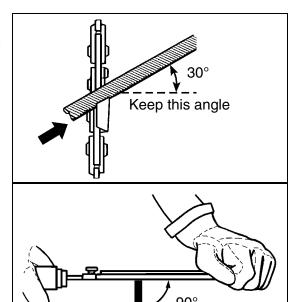


MAINTENANCE CS-303T

• Place the depth gauge tool firmly on guidebar so that depth gauge protrudes. Then file top of depth gauge with the flat file until flat with top of the depth gauge tool.

- One fifth of the file diameter remains above cutter edge.
- Be sure to round off the front edge of the depth gauge.


• Properly filed cutters are shown in illustration.



- When chain has been filed on the bar, supply sufficient oil to it, move the chain slowly to wash away the filings before using again.
- If the chain saw is operated with filings clogged in the groove, the saw chain and the guide bar will be damaged prematurely.
- If the saw chain becomes soiled with resin, for instance, clean it with kerosene and soak in it oil.

#### **NOTICE**

To sharpen other chains, follow chain manufacturer's instructions.

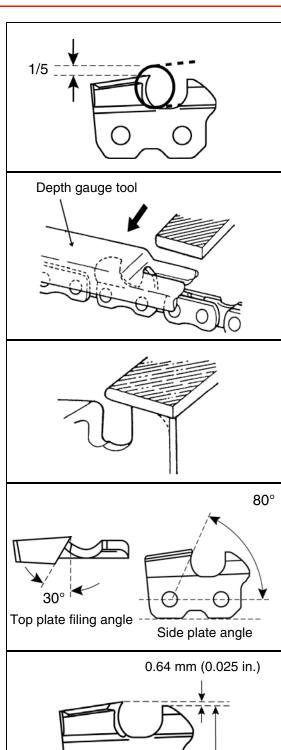

Parallel
Depth gauge

# **TROUBLESHOOTING**

	ENGINE PROBLEM TROUBLESHOOTING CHART					
Problem	Check	Status	Cause	Remedy		
	Fuel at carburetor	No fuel at carburetor	Fuel strainer clogged Fuel line clogged Carburetor	Clean or replace Clean or replace See your Echo dealer		
		No fuel at cylinder	Carburetor	See your Echo dealer		
Engine cranks - starts hard/	Fuel at cylinder	Muffler wet with fuel	Fuel Mixture too rich	Open choke Clean/replace air filter Adjust carburetor See your Echo dealer		
doesn't start	Spark at end of plug wire	No spark	Stop switch off Electrical problem Interlock switch	Turn switch to ON See your Echo dealer See your Echo dealer		
	Spark at plug	No spark	Spark gap incorrect Covered with carbon Fouled with fuel Plug defective	Adjust to .65mm (0.026 in.) Clean or replace Clean or replace Replace plug		
	Air filter	Air filter dirty	Normal wear	Clean or replace		
	Fuel filter	Fuel filter dirty	Contaminants/residues in fuel	Replace		
Engine runs, but dies or	Fuel vent	Fuel vent plugged	Contaminants/residues in fuel	Clean or replace		
does not	Spark Plug	Plug dirty/worn	Normal wear	Clean and adjust or replace		
accelerate	Carburetor	Improper adjustment	Vibration	Adjust		
properly	Cooling System	Cooling system dirty/plugged	Extended operation in dirty/dusty locations	Clean		
	Spark Arrestor Screen	Spark arrestor screen plugged	Normal wear	Replace		
Engine does not crank	N/A	N/A	Internal engine problem	See your Echo dealer		

# **A** DANGER

Fuel vapors are extremely flammable and may cause fire and/or explosion. Never test for ignition spark by grounding spark plug near cylinder plug hole, otherwise serious personal injury may result.

STORAGE CS-303T

# **STORAGE**

# **Storage After Use**

- · Inspect and adjust every part of the chain saw.
  - · Completely clean every part and repair if necessary.
  - Apply thin coating of oil on metal parts to prevent rust.
- · Remove chain and guide bar.
- Drain fuel tank completely. Press purge bulb 6 7 times to remove remaining fuel from carburetor then drain the tank again. Close choke, start and run the engine until it stops due to lack of fuel.
- Allow engine to cool then remove the spark plug and pour 7 cc (1/4 oz.) of fresh, clean, two-stroke engine oil into the cylinder through the spark plug hole.
- Store in a dry area, free from dust.

#### **WARNING**

Do not store in an enclosure where fuel fumes may accumulate or reach an open flame or spark.

#### **A** CAUTION

Do not lend or rent your chain saw without the Instruction manual and Safety manual.

#### Note:

36

- For future reference, you should keep this Instruction manual and the Safety manual.
- If this Instruction manual or the Safety manual has become illegible or is lost, please contact your ECHO dealer, or go to www.echo-usa.com.

# **TECHNICAL DATA**

Model	CS-303T
Length	260 mm (10.2 in.)
Width	235 mm (9.3 in.)
Height	220 mm (8.7 in.)
Dry weight	3.5 kg (7.7 lb.) Without chain and guide bar
Engine	Air-cooled two-stroke single cylinder
Displacement	30.1 cm <sup>3</sup> (1.84 cu. in.)
Bore	37.0 mm (1.46 in.)
Stroke	28.0 mm (1.10 in.)
Compressions ratio	7.58 : 1
Carburetor	Diaphragm type
Spark plug	NGK BPM8Y
Fuel tank capacity	250mL (8.5 US. fl. oz.)
Fuel	50 : 1 ratio with ECHO Power Blend X <sup>™</sup> , ISO-L-EGD (ISO/CD 13738) and JASO M345-FD two-stroke, air-cooled engine oil.
Gasoline	Use 89 octane unleaded. Do not use fuel containing methyl alcohol, or more than 25% ethyl alcohol.
Oiling system	Adjustable automatic oiler
Chain oil capacity	150 mL (5.1 US. fl. oz.)
Starter system	Automatic rewind starter
Clutch	Centrifugal type
Sprocket type	Spur type, 6-tooth, 3/8 in. pitch
Chain brake	Manual and non-manual band brake type
Idle speed	3,050 RPM
Clutch engagement speed	4,400 RPM
Wide open throttle speed (W.O.T.)	12,150 RPM
Chain tensioner	Side access system
Guide bar	12, 14 in
Saw chain	91PX
Standard features	Top handle, Front hand guard, Anti-vibration device, Throttle control lockout, Chain catcher, Spark arrestor muffler
Kickback safety features	Double Guard Low Kick Guide Bar, Low Kick Guard Link Saw Chain, Front Hand Guard/Chain Brake Lever, Kick Guard


<sup>\*</sup> Technical data subject to change without notice.

#### SERVICING INFORMATION

#### **Parts/Serial Number**

Genuine ECHO Parts and ECHO REPOWER™ Parts and Assemblies for your ECHO products are available only from an Authorized ECHO Dealer. When you do need to buy parts **always** have the Model Number and Serial Number of the unit with you. You can find these numbers on the engine housing. For future reference, write them in the space provided below.

Model No.	SN.	
-----------	-----	--

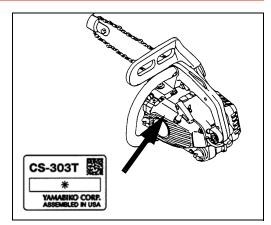

# **Additional or Replacement Manuals**

Replacement Operator, Safety Manuals, and Parts Catalogs are available from your ECHO dealer or at echo-latinamerica.com .

# **Warranty Registration**

To ensure trouble free warranty coverage it is important that you register your ECHO equipment on-line at <a href="mailto:echo-latinamerica.com">echo-latinamerica.com</a> or by filling out the warranty registration card supplied with your unit. Registering your product confirms your warranty coverage and provides a direct link between you and ECHO if we find it necessary to contact you.

#### **Service**

Service of this product during the warranty period must be performed by an Authorized ECHO Service Dealer. For the name and address of the Authorized ECHO Service Dealer nearest you, ask your retailer or call:

Country	Distributor Name	Address	Phone
Argentina	Munditol S.A.	Avda. Honduras 3757 1180 Buenos Aires, Argentina	11-4821-9999
Belize	Power Plus Ltd.	#1 North Front Street Belize City, Belize	(501) 22-30-690
Bolivia	Termondinamica Ltda.	Avenida Villazon #3671 Cochabamba, Bolivia	(591-4) 471-7730
Brasil	Brudden Equipamentos Ltda.	Av. Industrial 700 - Distrito Industrial CEP 17580-000, Pompeia (SP), Brazil	(55) 14-3405-5000
Chile	DercoMaq S.A.	Av. Américo Vespucio Norte 1838 Quilicura, Santiago Chile	(56) 2 - 560 1500
Colombia	Mecanelectro S.A.	Avenida Caracas No 76 -81	(571) 7430003
Panama	Cortagramas y Repuestos S.A.	Villa Rica, Monte Oscuro/Edif. Coresa. Panamá Rep, de Panamá	507-222-2844 / 4844
Republica Dominicana	Servicios Ferro-Agro, C por A	Calle Peña Batlle No 261 casi esq. Ortega y Gasset, Santo Domingo Dominican Republic	(809) 565-9787
Ecuador	Agrota Cía. Ltda.	"Contigo en el Campo" Av. De las Américas y Los Naranjos Cuenca, Ecuador	074-100-010
El Salvador	N.R. CONSA S.A. de C.V.	Casa Matriz: Urb. Madreselva c. El Algodón No.8 Por Blvd Constitución. San Salvador, El Salvador	(503) 22742220

Country	Distributor Name	Address	Phone
Guatemala	Femco S.A.	(i.e. Felix Montes CIA S.A.) Calzada Aguilar Batres 27-23, Zona 12 Guatemala, 01012	(502) 2442-3277
Honduras	Eyl Comercial S.A.	Ave. Re. de Chile Tegucigalpa M.D.C., Honduras	(504) 232-3389
Mexico D.F.	KARVS PROJARDIN & AGRO S.A. DE C.V.	MARIANO ESCOBEDO NUM 70 LOCAL A COLONIA POPOTLA MEXICO D.F. C.P. 11400 Co.Code:52	(55) 5348-1577
Greater Mexico	Promotores Agricolas SA de CV	Blvd. Paseo Solidaridad 12574 Fracc. Vilas el Dorado cp 36630, Irapuato Guanajuato, México	52 462 626 3443
Nicaragua	Formunica	De la Esquina Norte del Canal 2 de TV 1c. al lago 1 1/2c. Arriba Residencial Bolonia Managua, Nicaragua	(505) 268-7041
Peru	Vidagro S.A.C.	Av. Ingenieros Norte 251 Urb. Villa La Merced, Ate-Vitarte Lima, Peru	(51) 1-348-4726
Puerto Rico	Romar Agencies	Camino Romani Int. Carretera 842 Rio Piedras, San Juan Puerto Rico 00926-9678	(787) 720-5959
Us Virgin Islands	EZ Tool Rental and Sales	PO Box 2072 Kingshill, Saint Croix US VIRGIN ISLANDS	(340) 692-2039
Trinidad and Tobago	Trintrac Limited	No. 8 Bolai Trace I.D.C. Estate, Chase Village Trinidad, West Indies	(868) 672-5329
Uruguay	Goldfarb	Rio Negro 1617 Montevideo 11100 Uruguay	(598) 2902 2606
Venezuela	Distribuidora Agrofor C.A.	Calle Bolivar-Edificio Agrofor La Trinidad, Caracas, 1080, Venezuela	(58) 212-945-9960
Jamaica	Central Agricultural Supplies Co. Ltd.	5 ½ Caledonia Road Lot 10-11 James Plaza Mandeville, Manchester, Jamaica	876-962-3084
Paraguay	Agripar S.A.	Avda. San Blás Km. 3 1/2 Ruta Inter. Nro 7 B* Pablo Rojas- Ciudad Del Este - Paraguay	(061) 570 081



www.echo-usa.com

C31826001001/C31826999999